


SPECIFICATIONS


Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)

Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

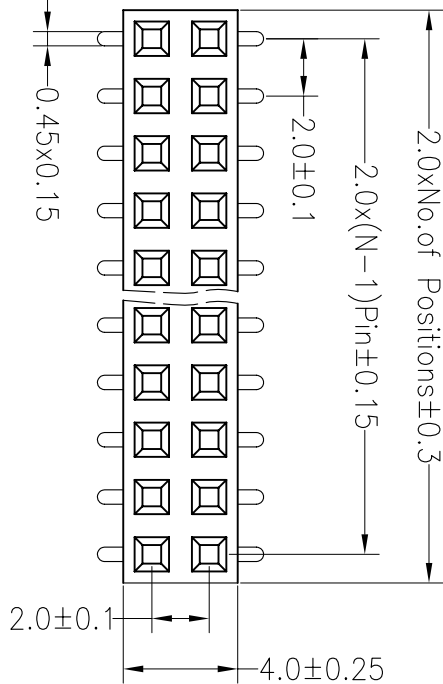



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

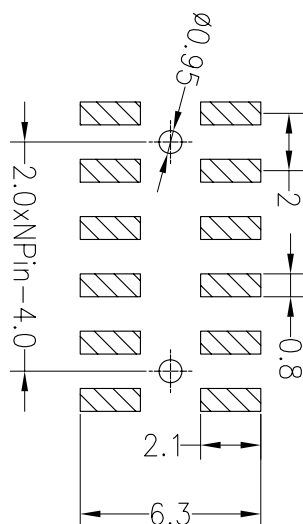

Ordering Information

2328 02 XX X XX M U X01

No. of Pins Per Row: 2x2~2*40
 Insulator Material Option:
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP
 Post Option:
 W=With Post
 N=W/O Post
 Contact Plating:
 G0:Gold Flash
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 Packing:
 O=PE Bag
 A=Troy
 T=Tube
 P=Tube+Cap
 R=Reel+Cap
 M=Reel+Mylar
 SN:Tin

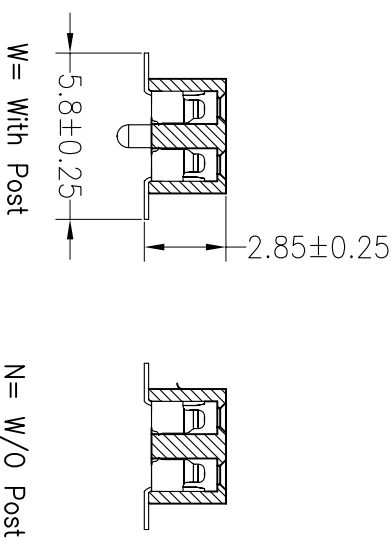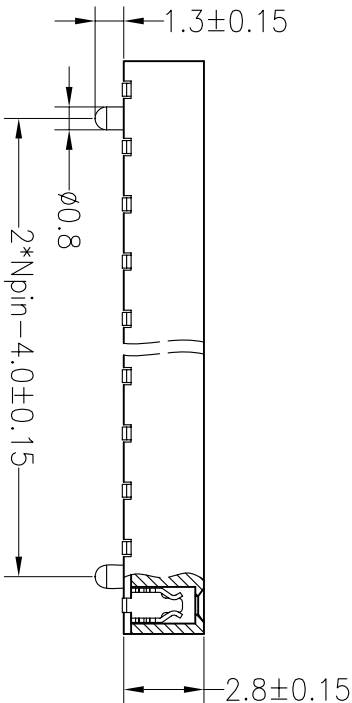

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	BEN	14.07.10	SCALE		FIT	PART NO.	TITLE:
				X.X	±0.30				UNIT	mm			
A0	2014.07.10	NEW DRAWING		X.XX	±0.20	CHECK			SIZE	A4	1/1	232802XXXXXXXXMUY01	2.00PF H2.80mm 2xNpin SMT
				X.XXX	±0.10				SHEET	1/1			
				Angle	±3°	APPROVE			PROJ.				
				DIM	TOL								

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992