

**HSE** RoHS **CAI** us **CE**

**SPECIFICATIONS**

Rated (额定参数): 150V, 6A  
 Dielectric strength(抗电强度): AC1500V/1 Minute  
 Insulation Resistance(绝缘电阻):1000MΩ Min  
 Contact Resistance(接触电阻):20mΩ Max  
 Screw Torque(扭矩): 0.10Nm (0.89Lb.in)  
 Wire Range(线径):26~18AWG  
 Strip length(剥线长度):3.7~4.7mm  
 Temp. range(操作温度): -40℃~+105℃  
 MAX Soldering(瞬时温度):+250℃,5s





Housing Material(塑件): PA66 (UL94 V-0)  
 Contact(端子): Brass, Tin plating(黄铜镀锡)  
 Clamp(方块): Brass/Steel(铜/铁), Ni plating(镀镍)  
 Screw (螺丝): M1.6, Steel, Zinc plating(钢 镀锌)

IN MM	PITCH RANGE		NOMINAL DIMENSION RANGE	
	OVER	TO	OVER	TO
6	10	TO	30	60
10	24	TO	60	100
±0.10	±0.15	±0.25	±0.30	±0.50
			±0.30	±0.70
				±1.00

**Ordering Information**

**JL 308 - 254 XX G X 1**

Pitch 254=2.54PH  
 No.of pins 2P~12P  
 Housing Color B=Black G=Green U=Blue R=Red W=White Y=Yellow O=Orange E=Grey  
 Packing 0=Be bag A=Troy T=Tube

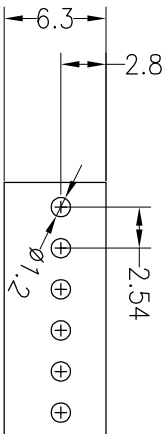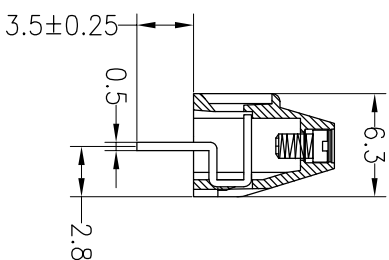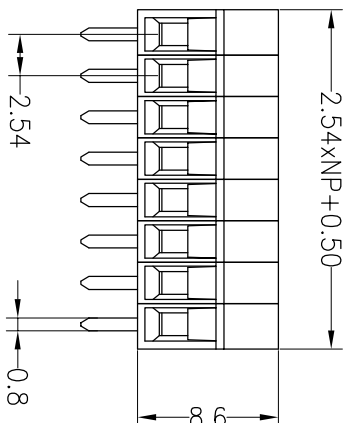

Recommended P.C.B Layout(Top Side)

REV		DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	SCALE	FIT	UNIT	SIZE	SHEET	PROU.	TITLE:	PART NO.
A0		2017.01.04	NEW DRAWING		Angle	±3°			A4	mm	A4	1/1		JL308-254XXGX1	
1															
2															
3															
4															
5															
6															
7															
8															
9															

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

2.54mm Terminal Blocks Female