



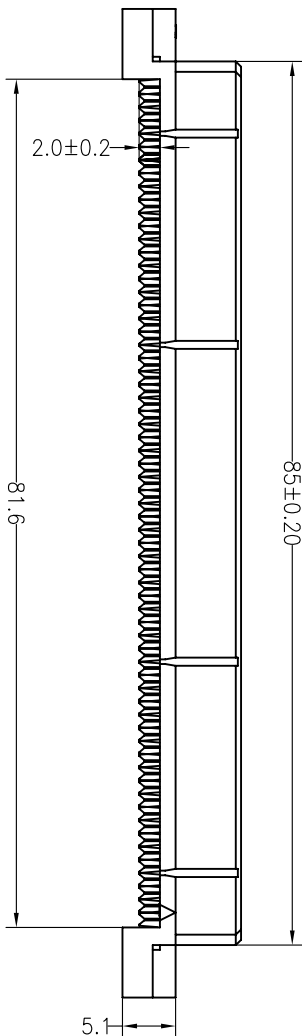



# HSE ROHS

## SPECIFICATIONS

Rated Current: 3.0AMP  
 Contact Resistance: 30mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C


Contact Material: Phosphor Bronze  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT  
 Max. Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

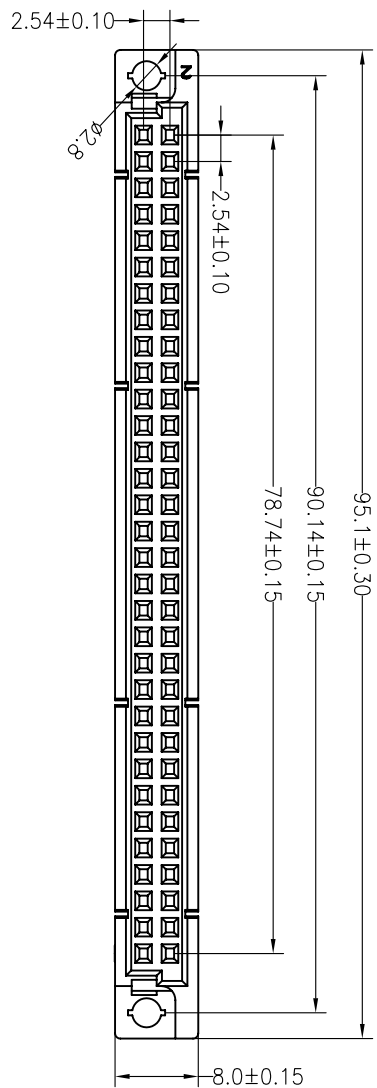

## Ordering Information

3512-2 64 B F I XX P N A1

No. of Pins: 64=64Pin  
 Contact Plating: NI:NI  
 SO: Gold Flash/Ni

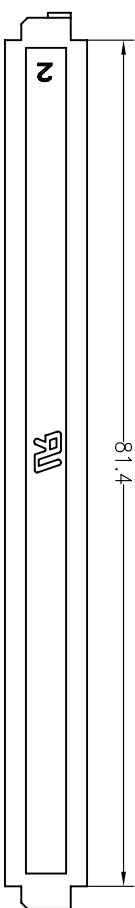

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

3512-264BFXXPVA1

Din41612 264 Female IDC-Type

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YTYuSheng	15.08.10	SCALE		FIT	PART NO.
				X.X	±0.30				UNIT	mm		
A0	2015.08.10	NEW DRAWING		X.XX	±0.20	CHECK			A4	mm	1/1	
				X.XXX	±0.10				SIZE		1/1	
				Angle	±3°	APPROVE			SHEET			
				DIM	TOL				PROJ.			