




UL&CSA GRADE:
 UL Style.....2651
 Rate Temperature.....-20°C to 105°C
 Rate Voltage.....Max 300V
 Flame Test.....VW-1

CSA Standard.....C22.2 NO.210.2
 Rate Temperature.....-20°C to 105°C
 Rate Voltage.....Max 300V
 Flame Test.....FT1.FT2

Physical Property:
 Stranded Conductor
 AWG Size.....28AWG
 Material of Insulation.....Polyvinyl Chloride(PVC)
 Insulation thickness average.....9 mil

Pin No.	Color
1	Brown
2	Red
3	Orange
4	Yellow
5	Green
6	Blue
7	Purple
8	Grey
9	White
10	Black
11	Brown
12	Red

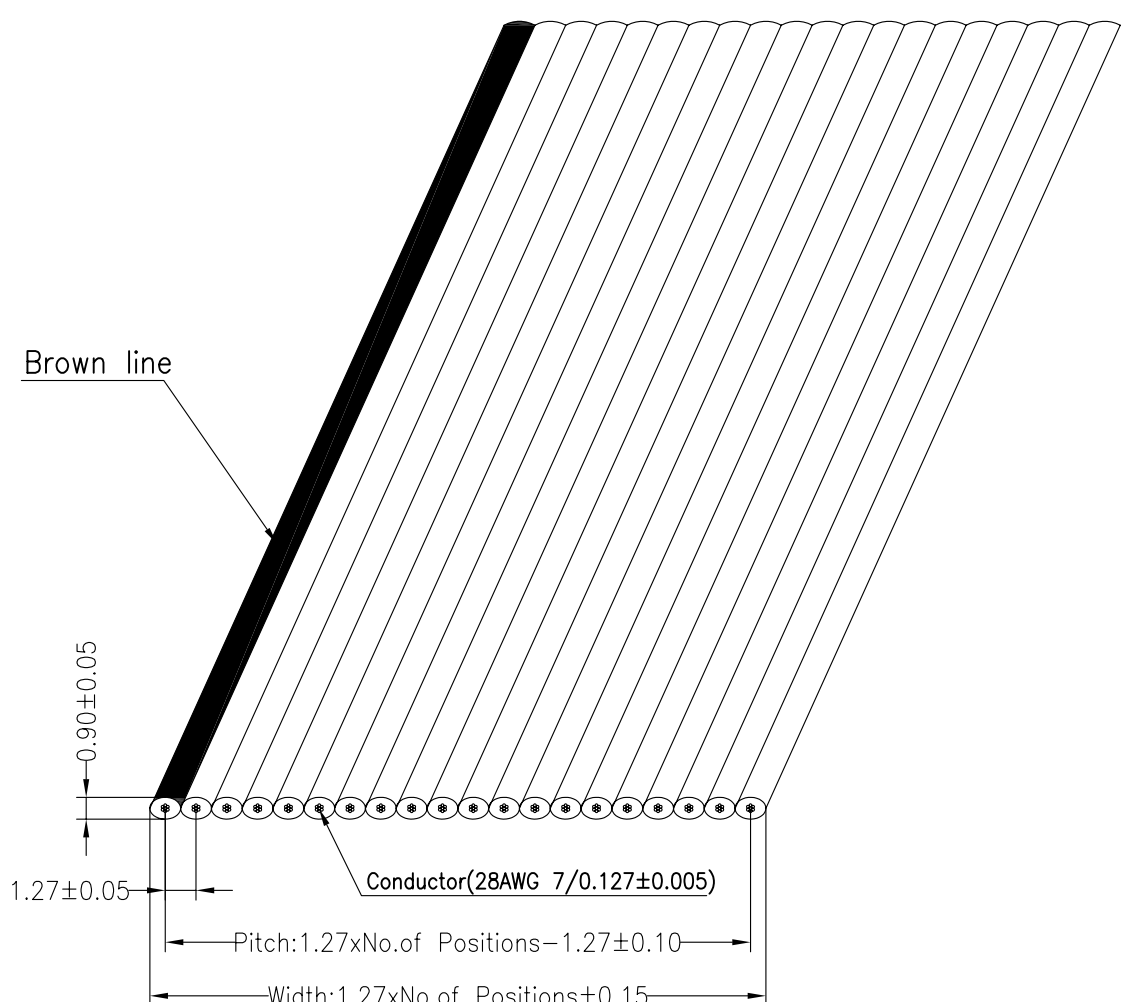

Ordering Information

G 1 1 2651 - 28 XX 0061 - 01R

Pitch
1=1.27

No. of Pins
4P~64P

Length
0061=61m/Reel

		OPERATION		DRAW	YiYuSheng	15.01.28	SCALE	FIT	深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
		X.X	±0.30				UNIT	mm		
		X.XX	±0.20	CHECK			SIZE	A4	PART NO. G112651-28XX0061-01R	
A0	2015.01.28	X.XXX	±0.10	APPROVE			SHEET	1/1	TITLE: 1.27mm Flat Cable UL2651 28AWG Rain bow Cable	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE		DIM	TOL	PROJ.			